


MARWELL NEWS

June 2005

200 Amp Underground Conversion Adapter

Easily convert the service entrance from overhead to underground. **200A Rated**

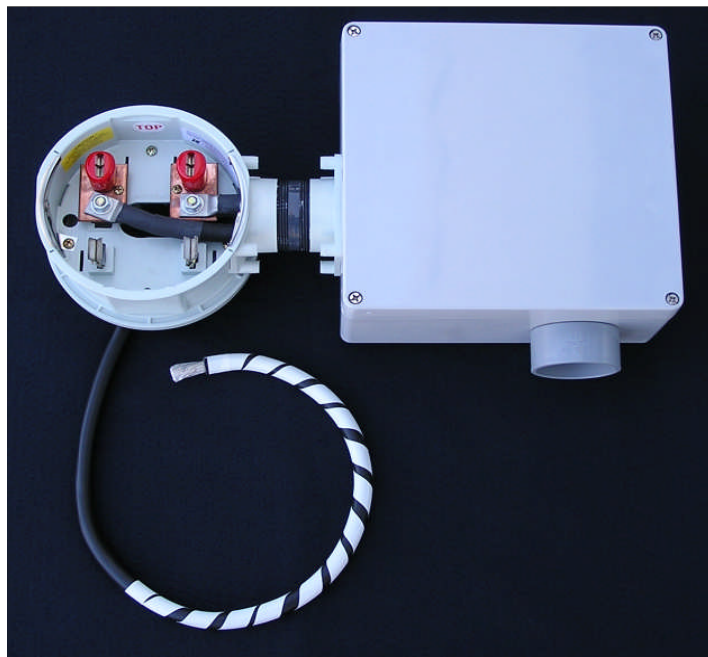

The Marwell 200A OH/UG adapter. This adapter is designed for just one purpose. The conversion of service entrance from overhead to underground. Available in ring and ringless models to fit most applications.

Termination lugs in pull section will except wire sizes of #6 AWG - 250 MCM.

Will not interfere with panel openings located below the meter.

Polycarbonate threaded hubs between adapter and enclosure ensure strength and stability without grounding and corrosion issues.

Sealable cover for security purposes.

OPTIONS:

LEFT or RIGHT side mounting
RING or RINGLESS

Up to 3" pre-installed PVC glue hub
or weatherproof hub

SPECIFICATIONS

Rated: 200 Amps continuous

Neutral lead: 1/0 Copper welding cable
with tinned end


Enclosure: NEMA 3R,4X,6,6P

Ringless, Box on Left 1800-OHUG-L

Ringless, Box on Right 1800-OHUG-R

Ring Style, Box on Left 1000-R-OHUG-L

Ring Style, Box on Right 1000-R-OHUG-R

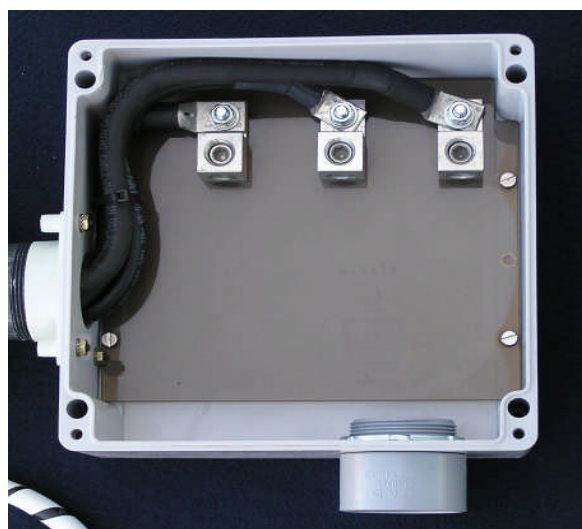

Hub normally Pre-installed - Glue type
For Field installation of hub, add "F" to
item number. For threaded hub add "T"
to item number.



World's leading manufacturer of UL Listed meter socket adapters

MARWELL CORPORATION

PO BOX 139 * Mentone, CA 92359 * 909-794-4192 * FAX 909-794-0250

