


Quick Generator Hook-up

The Marwell 1000-0-R2-GENSET adapter allows a 4KW residential emergency generator to be connected to a house in under 5 minutes. The special meter socket adapter shown below is specifically design for generator connection. It will store the meter "out of service" and does not have any line side stabs, making back-feed impossible.

A #10 white wire (included) from the center terminal can be easily lugged to the neutral conductor of the house. The two power lugs can be wired to supply 120V only to both load phase or 240V to the whole house, depending on the situation. The power lead to the generator is with either a #10-3 SO cord or flexible conduit. A 1/2 inch (7/8 actual) or 3/4 inch (1-1/6 actual) conduit hole has been provided for a strain relief or conduit fitting. Additional options available.

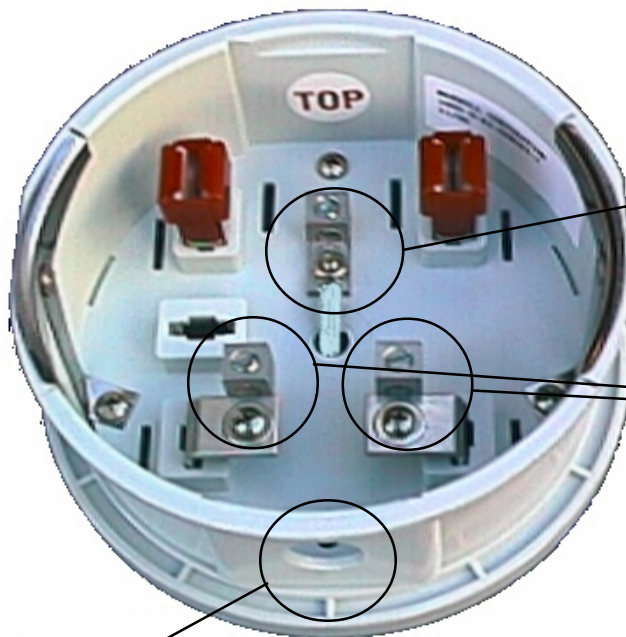

Neutral lug with white lead attached. White lead extends out through base for attachment to the socket neutral.

Power lugs

1/2 inch KO

ORDERING INFORMATION

1000-0-R2-GENSET-1/2 with 1/2 KO
1000-0-R2-GENSET-3/4 with 3/4 KO
Other options available

For information email david@marwellcorp.com



World's leading manufacturer of UL Listed meter socket adapters

MARWELL CORPORATION



PO BOX 139 * MENTONE, CA 92359 * 909-794-4192 * FAX 909-794-0250