


“STORAGE” adapter for PSD Disconnects

The Marwell Portable Safety Disconnect is a safe and convenient method of disconnecting a clamp jaw bypass customer under load. After the service has been disconnected an extension adapter must remain clamped in the meter socket jaws. Sometimes the meter will be removed from the site, but more commonly it will be booted and inserted back into the adapter for storage.

Marwell has a better answer. We created a special adapter for residential PSD disconnects that includes a storage jaw to hold the meter in an “out of service” position. It’s a simple idea that works. Ask for a sample of the 1000-0-R4/5-PSD.

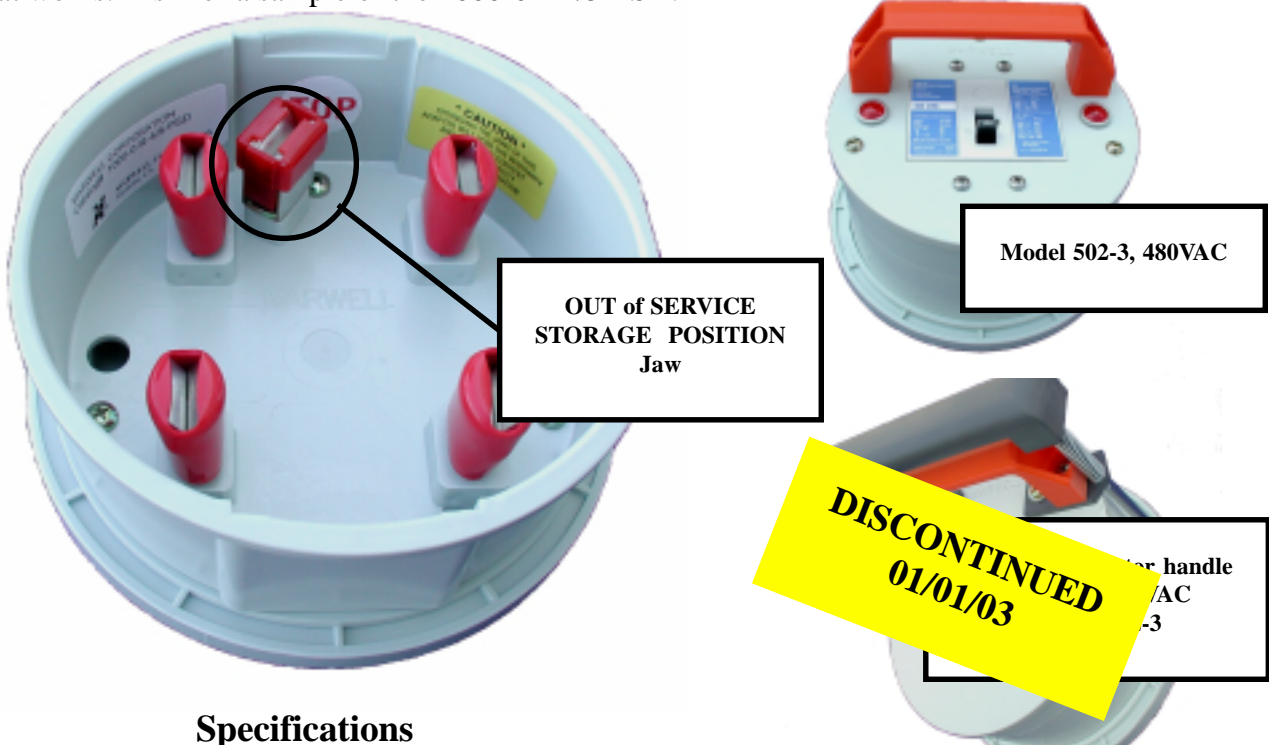

Specifications

Based on UL Listed Marwell 1000-0-R4
600 VAC Rated.
Suitable for Class 320 and Class 200 disconnects.
Single jaw to hold parked meter.
Keyed stab available for 320A only sockets.

Ordering Instructions

Model 1000-0-R4/5-PSD
- 5 th jaw in park position.

For information email david@marwellcorp.com



World's leading manufacturer of UL Listed meter socket adapters

MARWELL CORPORATION



PO BOX 139 * MENTONE, CA 92359 * 909-794-4192 * FAX 909-794-0250