


Residential In-Series Adapters

Unique full offset design in all Horizontal and Vertical models. Fits meter sockets in tight corners. Reversible mount, left to right or top to bottom.

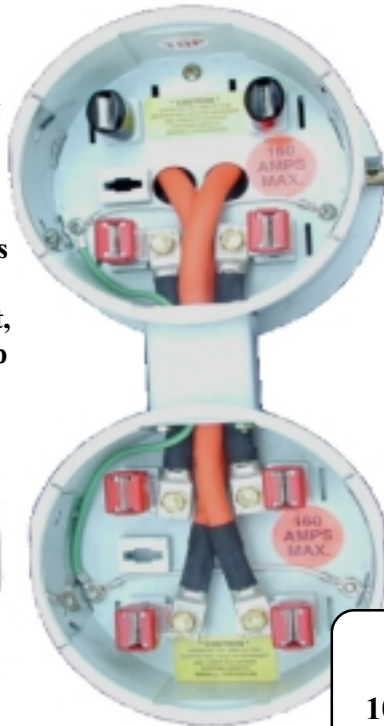

1800-4/4-V mounted with secondary meter under.

In-series adapters place two meters in-series and mount them in a single meter socket. Available in CT rated and residential self-contained versions.

Self-contained versions should always be applied with caution as the rating of the adapter is often less than the rating of the socket. The concern has always been, "how much less"?

The new Marwell in series adapters for 2S meters will reduce your concerns. The patented Mighty - Bite jaw combined with heavy duty copper welding cable has created an in-series adapter that will smoke the competition.

Rated at 160A maximum and 150A continuous it may safely be used to install two meters into one socket on most residential service sites.

Ordering Information

1000-R-4/4-V, 4 Jaw Vertical Ring Style

1000-R-4/4-H, 4 Jaw Horizontal Ring Style

1800-4/4-V, 4 Jaw Vertical Ringless style

1800-4/4-H, 4 Jaw Horizontal Ringless style

ADD **-P2** for 2 Cable exit ports on one housing

ADD **-P4** for 4 Cable exit ports on two housings

Send a sketch or contact Marwell for specials.

Specifications

Adapter rated for 160 Amp service at 150 Amps continuous.

Full offset from primary meter and reversible mount.

Options

- Available with 4, 5 jaws in Self contained
- 6, 8, and 13 jaw CT Rated
- 1800 Series Base for Ringless sockets
- 1000 Series Base for Ring sockets
- Communications cable exits
 - Covered Notch style
 - Sealed cord grip style

"P" - Port option for exiting communication cables. Option provides covered 5/8" notch type ports to exit meter cable. Cables may be sealed with silicone sealer.



For information email david@marwellcorp.com



World's leading manufacturer of UL Listed meter socket adapters

MARWELL CORPORATION



PO BOX 139 * MENTONE, CA 92359 * 909-794-4192 * FAX 909-794-0250